



LRSE18-050A-00-10A

LRSE-18/LRSI-18 LVIT Linear Position Sensors

Low cost, compact, high performance gauging probes

The LRSE-18/LRSI-18 series of LVIT (Linear Variable Inductance Transducer) spring loaded position sensors by Alliance Sensors Group are contactless devices designed for dimension or position measuring applications in factory automation and in various industrial and commercial applications where the sensing element cannot be attached to the object being measured. Typical applications include the following:

- Automotive testing
- Robotic arms
- Packaging equipment
- Mil/aero test stands

LRSE-18/LRSI-18 Linear Variable Inductance Transducers are offered in full scale ranges from 0.5 to 4.0 in [12.7 to 101.6 mm] with excellent resolution and high stroke-to-body-length ratios. The maximum tip force on the item being measured is 1lbf [0.454 kgf].

LRSE-18/LRSI-18 series sensors have a 0.75 in [19mm] diameter aluminum or stainless steel body with an M18x1 thread. These sensors are supplied with two hex jam nuts for easy installation.

These sensors use a 0.25 in [6.35 mm] diameter probe equipped with an AGD No. 9 contact tip and are offered with an axial cable. Operating from a variety of DC voltages, models are available with either

0-10 V or 4-20 mA output (see table below). All include ASG's proprietary SenSet™ field calibration feature.

Features

- Spring loaded LVIT Technology™ (Linear Variable Inductance Transducer)
- Ranges from 0.5 to 4.0 in [12.7 to 101.6 mm]
- Contactless operation prevents internal wearout from dithering or rapid cycling
- Excellent stroke-to-body-length ratio
- Proprietary SenSet™ field adjustable range scaling

Alliance Sensors Group LRSE-18/LRSI-18 Series Linear Position Sensors Selection Chart

Part Number	Price	Nominal Range (in [mm])	Body Length (Dimension A) (in [mm])	Spring Rate (lbf/in [kgf/cm])	Maximum Force (lbf [kgf])
0-10 V models					
LRSE18-013A-00-10A	\$366.00	0.5 [12.7]	3.04 [77.2]	0.75 [0.134]	0.9 [0.41]
LRSE18-025A-00-10A	\$390.00	1.0 [25.4]	3.54 [89.9]	0.75 [0.134]	0.9 [0.41]
LRSE18-050A-00-10A	\$415.00	2.0 [50.8]	4.62 [117.3]	0.43 [0.077]	1.0 [0.45]
LRSE18-075A-00-10A	\$440.00	3.0 [76.2]	5.69 [144.5]	0.30 [0.054]	1.0 [0.45]
LRSE18-100A-00-10A	\$464.00	4.0 [101.6]	6.80 [172.7]	0.23 [0.041]	1.0 [0.45]
4-20 mA models					
LRSI18-013A-00-20A	\$366.00	0.5 [12.7]	3.04 [77.2]	0.75 [0.134]	0.9 [0.41]
LRSI18-025A-00-20A	\$390.00	1.0 [25.4]	3.54 [89.9]	0.75 [0.134]	0.9 [0.41]
LRSI18-050A-00-20A	\$415.00	2.0 [50.8]	4.62 [117.3]	0.43 [0.077]	1.0 [0.45]
LRSI18-075A-00-20A	\$440.00	3.0 [76.2]	5.69 [144.5]	0.30 [0.054]	1.0 [0.45]
LRSI18-100A-00-20A	\$464.00	4.0 [101.6]	6.80 [172.7]	0.23 [0.041]	1.0 [0.45]


Alliance Sensors Group LRSE-18/LRSI-18 Series Linear Position Sensors Specifications

Analog I/Os	0-10 VDC output with 12-30 V power source, 35 mA max; 4-20 mA (3-wire) output with 18-30 V power source, 60 mA max, 167°F [75°C] max
Measuring Ranges	0.5 to 4.0 in [12.7 to 101.6 mm] full scale
Linearity Error	±0.15% of full scale output (FSO) typical, ±0.25% max
Resolution	0.025% of full scale
Operating Temperature	-4°F to 185°F [-20°C to +85°C]; -40°F to +221°F [-40 to +105°C] extended range
Temperature Coefficient	±0.015% of FS/K
Vibration	5-20 Hz, 0.5 in peak-to-peak; 20-2000 Hz, 4.2 g peak-to-peak
Shock	1000g, 11ms
Terminations	IEC IP-67
Humidity	95% RH, non-condensing
Connection	1M, PUR, 4 conductor, 24AWG

LRSE-18/LRSI-18 LVIT Linear Position Sensors


Dimensions

in [mm]

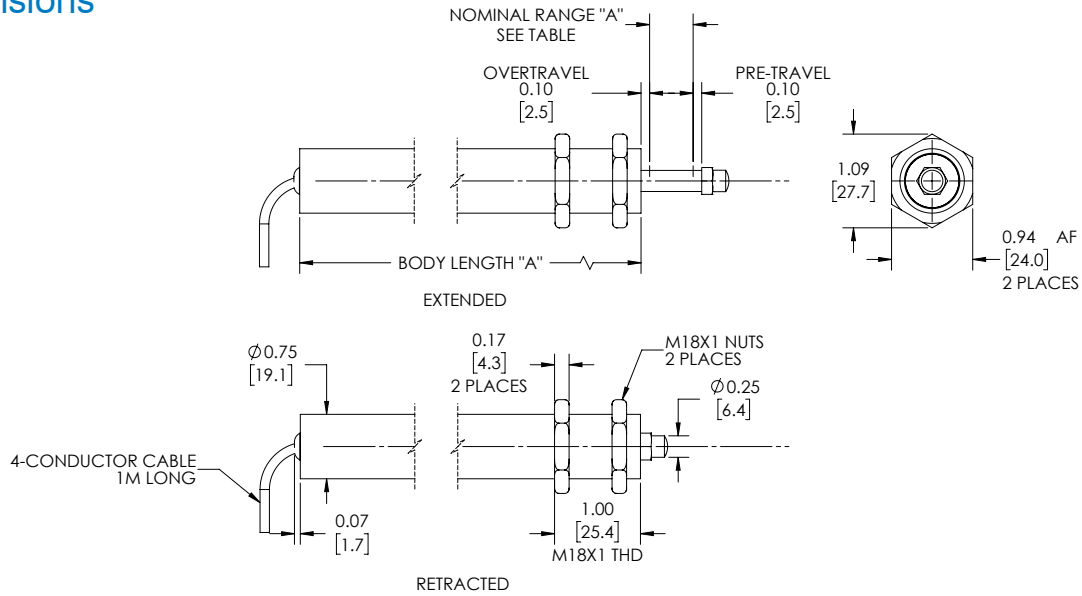

Alliance Sensors Group LRSE-18/LRSI-18 LVIT Linear Position Sensors Dimensions		
Part Number	Nominal Range (in [mm])	Body Length (Dimension A) (in [mm])
0-10 V models		
LRSE18-013A-00-10A	0.5 [12.7]	3.04 [77.2]
LRSE18-025A-00-10A	1.0 [25.4]	3.54 [89.9]
LRSE18-050A-00-10A	2.0 [50.8]	4.62 [117.3]
LRSE18-075A-00-10A	3.0 [76.2]	5.69 [144.5]
LRSE18-100A-00-10A	4.0 [101.6]	6.80 [172.7]
4-20 mA models		
LRSI18-013A-00-20A	0.5 [12.7]	3.04 [77.2]
LRSI18-025A-00-20A	1.0 [25.4]	3.54 [89.9]
LRSI18-050A-00-20A	2.0 [50.8]	4.62 [117.3]
LRSI18-075A-00-20A	3.0 [76.2]	5.69 [144.5]
LRSI18-100A-00-20A	4.0 [101.6]	6.80 [172.7]

Wiring diagram

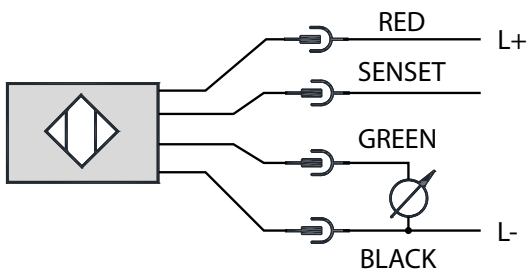

Wiring Table	
Function	Cable Color
+DC Power Input	Red
Common Ground	Black
Analog Output	Green
SenSet™	White