


IDEM Interlock Safety Actuator Keys

Actuator Keys

- 9 available keys
- All keys are 316 stainless steel
- Flexible key options available

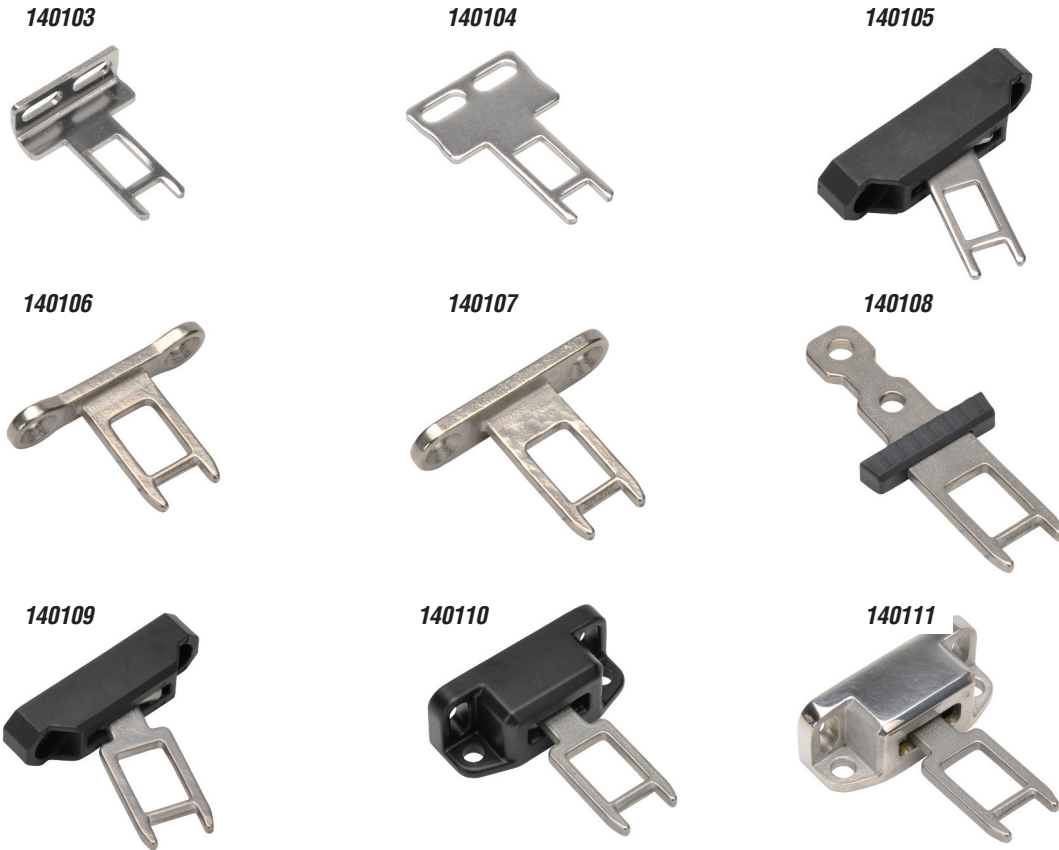

IDEM Interlock Safety Switch Actuator Tongue (Keys)

Part Number	Price	Description	Use with:			Weight (lbs)	Minimum Entry Radius	Dimensions
			IDIS-1	KP/K15	K-SS/KM/KM-SS			
140103	<--->	14.4 mm mounting hole spacing, 90-degree bent stainless steel key/mounting tab	✓			0.03	175 mm	Figure 1
140104	<--->	14.4 mm mounting hole spacing, straight stainless steel key/mounting tab	✓			0.03	175 mm	Figure 2
140105	<--->	40 mm mounting hole spacing, stainless steel key with polyester flexible mounting tab	✓			0.06	100 mm	Figure 3
140106	<--->	40 mm mounting hole spacing, 90-degree stainless steel key/mounting tab		✓**		0.07	175 mm	Figure 4
140107	<--->	40 mm mounting hole spacing, 90-degree stainless steel key/mounting tab		✓*	✓	0.07	175 mm	Figure 5
140108	<--->	20 mm mounting hole spacing, straight stainless steel key with plastic stop		✓	✓	0.07	175 mm	Figure 6
140109	<--->	40 mm mounting hole spacing, stainless steel key with polyester flexible mounting tab		✓	✓	0.10	100 mm	Figure 7
140110	<--->	40 mm mounting hole spacing, stainless steel key with black-painted aluminum flexible mounting tab		✓	✓	0.16	100 mm	Figure 8
140111	<--->	40 mm mounting hole spacing, stainless steel key with mirror polished stainless steel flexible mounting tab		✓	✓	0.22	100 mm	Figure 9

* Stainless steel head only

** Plastic head only